


REVOLVING TAILSTOCK CENTER

Revolving tailstock center with ground and hardend body.

Tip angle: 60°

Accuracy: 0,006 mm

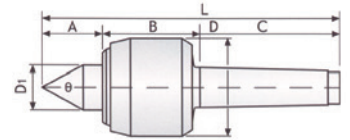


Item no.	MK	A mm	B mm	C mm	D mm	D1 mm	L mm	Φ	Max. weight	Max. RPM
50301510	1	20	41	55	34	18	115	60°	320 kg	2800
50301520	2	27	34	66	45	25	130	60°	400 kg	2800
50301530	3	31	43	83	52	28	160	60°	800 kg	2000
50301540	4	36	47	107	60	32	192	60°	1250 kg	1800
50301550	5	50	59	135	80	45	251	60°	1500 kg	1300

REVOLVING TAILSTOCK CENTER WITH EXTENDED LIVE CENTER

Hardened and grinded.

Accuracy: 0,006 mm

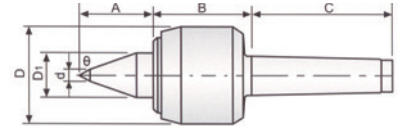


Vare nr.	MK	A mm	B mm	C mm	D mm	D1 mm	d mm	L mm	Max. weight	Max. RPM
50302620	2	34	38	67	45	20	10	139	140 kg	5000
50302630	3	47	44	85	60	25	12	176	400 kg	3000
50302640	4	53	56	107	70	32	14	217	500 kg	2800
50302650	5	65	71	134	90	40	16	273	1200 kg	1800

LIVE CENTER

High-Speed and Water-Proof, made of alloy steel and hardened to provide higher rigidity HRC 60 ±1, dualball bearing and needle roller bearing assembly.

Accuracy: ±0,003 mm.

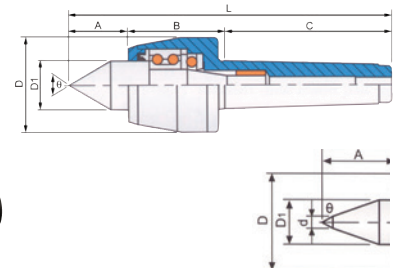


Drawing of type B, long tip

Vare nr.	Type	MK	A mm	B mm	C mm	D mm	D1 mm	d mm	L mm	Max. workpiece	Max. RPM
50310305	A	3	39	55	86	53	30	-	273	1200 kg	1800
50310410	A	4	42	62	108	63	32	-	208	800 kg	4500
50310515	A	5	49	71	136	83	40	-	256	1600 kg	3500
50311305	B	3	45	55	86	53	30	10	186	500 kg	5000
50311410	B	4	52	62	108	63	32	12	218	800 kg	4500
50311515	B	5	59	71	136	83	40	14	266	1600 kg	3500

BULL NOSE CENTER

Manufactured from high, quality alloy steel, centre point hardened to approx. 60HRC.

Φ : 75°



Item no.	MK	A mm	B mm	C mm	D mm	D1 mm	L mm	Max. workpiece	Max. RPM
50315310	3	59	16	86	106	25	161	500 kg	2600
50315420	4	108	8	109	200	41	235	1000 kg	1200

LIVE CENTER W/ EXCHANGEABLE POINTS

Supplied in a suitcase..



Item no.	MK	D1 mm	L1 mm	Weight
50302730	3	12	24	1,87 kg
50302740	4	15	30	2,42 kg
50302750	5	20	40	4,12 kg